



Compact switch for single user to access multiple systems and screens


## ADDER CCS4USB

Control switch for use with USB peripherals and audio, with RS232 control



### PRODUCT IN BRIEF

The CCS4USB is a breakthrough in command and control switching, delivering USB 2.0, bi-directional audio and True Emulation technology. CCS4USB is video independent (so can be used alongside DVI, VGA, Display Port etc). The CCS4USB allows you to work across all 4 computers and screens as though they were a single interface. Adder's unique True Emulation technology enables instantaneous and reliable hotkey switching whilst also supporting the extra keys and features of enhanced keyboards and mice. Furthermore, the CCS4USB includes two independently switchable USB 2.0 Hi Speed channels and an audio channel, giving the user the flexibility to attach selected peripherals to different computers.

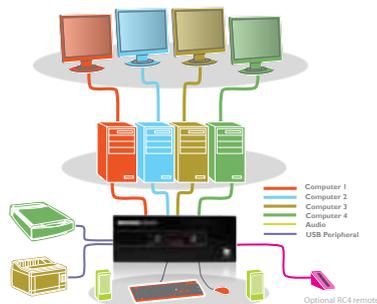

Example of switching flexibility on the CCS4USB. Diagram shows the switching of connected devices across all connected computers.

### FEATURES

#### True Emulation USB 2.0 technology

The CCS4USB is the first Command and Control switch to feature Adder's advanced USB True Emulation technology. Emulated USB provides an instantaneous and reliable switching action and makes keyboard hotkey and mouse switching possible. However, previous implementations have used only generic emulations and consequently have only been able to support the most basic keyboard and mouse features. Adder's revolutionary True Emulation technology overcomes this frustrating limitation by emulating the true character of the connected devices to all the computers simultaneously. This means that you can now use the extra function keys, wheels, buttons and controls that are commonly found on modern keyboards and mice.

#### Independent simultaneous device selection

Flexibility is key to the CCS4USB. The switch enables you to use the keyboard and mouse on one computer whilst your USB peripherals are connected to other computers and your speakers are playing audio from yet another. You can of course still switch all the connected devices to any one of the connected computers.

#### Channel selection options

The CCS4USB can be switched using selectable keyboard hotkeys, 3 button mice or the front panel controls. Optionally, you can also use the RC4 remote switch to make your selection. These switching options allow you to

rapidly reassign connected devices to any of the connected computers.

#### Broad USB 2.0 Hi Speed device support

A vast range of USB devices can be connected to the CCS4USB. From non standard human interface devices to printers and scanners. This gives great flexibility. For example, you could be scanning a set of documents onto one computer whilst working on another and printing from yet another, all at the same time. The USB 2.0 switching action has been carefully engineered to ensure maximum computer reliability when connecting and disconnecting USB devices.

#### FreeFlow Technology

Designed to work with CCS4USB, FreeFlow allows users to automatically switch between target computers simply by moving the mouse pointer from screen to screen. What makes this such a revolution is that you no longer need software to be installed on your mission critical computers for FreeFlow to work.

#### Options port for control and upgrade

An 'Options' port enables the CCS4USB to be remotely switched using simple ASCII codes. The port enables a 4 button switch unit (RC4) to be used with the CCS4USB. The same port can also be used to upgrade the firmware to guarantee that your hardware investment continues to deliver real value well into the future.

# ADDER CCS4USB

Control switch for use with USB peripherals and audio, with RS232 control

## ABOUT ADDER


Adder is a leading developer and thought leader in connectivity solutions. Adder's advanced range of KVM switches, extenders and IP solutions enable the control of local, remote and global IT systems across the enterprise. The company distributes its products in more than 60 countries through a network of distributors, resellers and OEMs. Adder has offices in the United States, United Kingdom, Germany, the Netherlands, Sweden, China and Singapore.

To find out more, visit:  
<http://www.adder.com>

## RELATED PRODUCTS

Adder offer a vast range of products to suit your needs. Other products you may be interested in include:

ADDER Trade Switch  
TS4

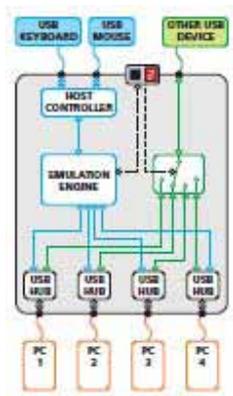

The Emulated section of the switch is shown in blue and handles only the keyboard and mouse. The green enumerated section of the switch handles other USB devices and also uses the USB hubs to link the computers.

## TECHNICAL SPECIFICATIONS

### Hardware compatibility

All computers with USB interfaces

### Software compatibility

Operates with all known software and operating systems including Windows (all), DOS, Linux, Unix, BSD, all Sun OS, all Mac OS, NetWare etc.

### Computer connections at switch

4 x USB 2.0 type B, 3.5mm stereo jack

### Local KVM console connection

Keyboard/Mouse: 2 x USB type A

Switched USB: 2 x USB 2.0 type A

Audio: 3.5mm stereo jack

Other Connections: Options (flash upgrade, sync with an other CCS4USB and RS232 triggered power switches):  
Modular IOPIOC

### Physical design

Metal case: 230mm(w), 85mm(d),  
40mm(h)

### Power

2.5mm DC jack (power adapter included), 100-240VAC 50/60Hz input to power adapter, 5VDC 2.5A output from power adapter

### Operating temperature

0 to 40°C / 32 to 104°F

### Approvals

CE, FCC

## ORDERING INFORMATION

CCS4USB-XX: Command & Control Switch (4 ports)

XX = Mains Lead Country Code:  
UK = United Kingdom  
US = United States  
EURO = Europe  
AUS = Australia

## ADDITIONAL ACCESSORIES

VSC24: USB cable 2m (type A to B)

VSC22: Audio cable 2m (3.5mm stereo jacks)

VSC40: Flash upgrade & FreeFlow configuration cable plus standard 3m patch lead

RC4-8P8C: RC4 remote control plus standard 3m patch lead



© Copyright 2012 Adder Technology Ltd. All brand names and trademarks are the property of their respective owners. LMccs4usb\_v4.indd

## ADDER TECHNOLOGY

Saxon Way, Bar Hill,  
Cambridge, CB23 8SL UK  
Tel: +44 (0)1954 780044 Fax: +44 (0)1954 780081  
email: [sales@adder.com](mailto:sales@adder.com) [www.adder.com](http://www.adder.com)

## ADDER CORPORATION

350R Merrimac St.  
Newburyport, MA 01950 USA  
Tel: +1 888 932 3337 Fax: +1 888 275 1117  
email: [usasales@adder.com](mailto:usasales@adder.com) [www.adder.com](http://www.adder.com)

## ADDER TECHNOLOGY ASIA PACIFIC

8 Burn Road  
#04-10 Trivex, Singapore 369977  
Tel: +65 6288 5767 Fax: +65 6284 1150  
email: [asiasales@adder.com](mailto:asiasales@adder.com) [www.adder.com](http://www.adder.com)

